


PosterBOX Mini

Specifications

Part number	701946-6WMLP1
Dimensions L x W x H	38 mm x 30 mm x 14 mm (1.5 in x 1.2 in x 0.6 in)
LEDs per module	1
Viewing angle	18 x 40°
Module spacing	188 mm (7.4 in) center-to-center
Operating temperature	-40° C to +60° C
Power per module	1.2 W
Efficacy	83 lm/W
Power capacity	45 modules per SloanLED 60 W 12 VDC power supply
Binning	MacAdam Step 3
Fastening	Peel-n-stick and mechanical
Packaging	60 modules per bag, 10 bags per carton
Color temperatures	6500 K
Lumens per module	100

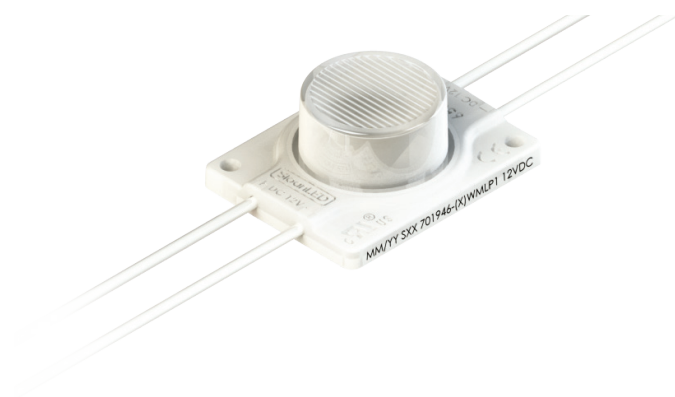

PosterBOX™ is licensed under: Patents CN200680037992.9, DE202006020673.6, NL1030161, US6932495, and US7841733; and patent applications EP06812715.8 and NL2000273. Green Signage, PosterBOX™ is a trademark of Lux et Libertas BV. SloanLED, the SLogo, and Leaders in LED Technology are trademarks of Sloan Company, Inc.

Power Supply Capacity

Item description (Part number)	Power output	Maximum modules
Modules per foot/meter		1.62
Self-Contained 20 W ¹ [701680]	20 W	15
Compact 12/25 W ² [410174]	25 W	19
60C1 60 W [701507-60C1] 60W1 60 W [701507-60W1] 60W2 60 W [701507-60W2] MODW(E) 60 W [701507-MODW(E)] MOD277 60 W [701507-MOD277]	60 W	45
120D1 120 W [701507-120D1]	120 W	45 x 2
Power used per module		1.2 W

1 Configured for Class 2 Output.

2 For sign applications, only certified for use outside of U.S. and Canada.

SloanLED Headquarters
805.676.3200 • info@SloanLED.com

SloanLED Europe b.v.
+31 88 12 44 900 • Europe@SloanLED.com



Visit product page
for details.



SloanLED.com

© 2018 SloanLED Rev A 2018-11-07

Specifications subject to change without notice.

