


PosterBOX™ ID

Large, shallow fabric-faced light box illumination for interior applications

Specifications

| | | |
|------------------------------------|--------------------------------------------------------------------------------|-------------------------------------------------------------|
| Part number | Short | 701946-6WSNP1 |
| | Long | 701946-6WLN1 |
| Dimensions L × W × H | Short | 225.0 m × 27.5 mm × 15.7 mm (8.9 in × 1.1 in × 0.62 in) |
| | Long | 495.3 m × 27.5 mm × 15.7 mm (19.5 in × 1.1 in × 0.62 in) |
| LEDs per assembly | Short | 3 |
| | Long | 6 |
| Operating temperature | -40° C to +70° C | |
| Locating rating | Indoor use only | |
| Power per assembly | Short | 7.2 W |
| | Long | 14.0 W |
| Optional dimming | PWM (Pulse width modulation, SloanLED Universal LED Wireless Dimmer 601115) | |
| Efficacy | Short | 118 lm/W |
| | Long | 121 lm/W |
| Power capacity | Per SloanLED 100 W 24 VDC power supply | |
| | Short | Maximum of 12 units |
| | Long | Maximum of 6 units |
| Fastening | Peel-n-stick and mechanical | |
| Packaging | Six (6) assemblies per bag, 5 bags per carton | |
| Color temperature | 6500 K | |
| Lumens per assembly | Short..... | 850 |
| | Long..... | 1,700 |

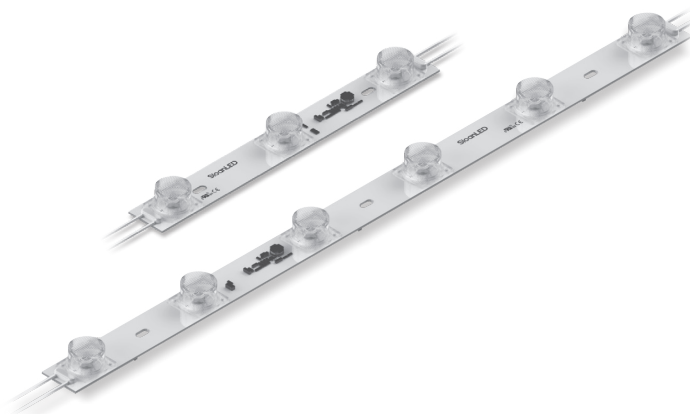

Power Supply Capacity

| 24 VDC power supply | Max. units per power supply | |
|------------------------------|-----------------------------|--------|
| | Short | Long |
| 100 W Power Supply | 12 | 6 |
| 300 W Power Supply | 3 × 12 | 3 × 6 |
| Power used per unit in Watts | 7.2 W | 14.0 W |

SloanLED Headquarters
5725 Olivas Park Drive, Ventura, CA, USA
805.676.3200 • info@SloanLED.com

SloanLED Europe b.v.
Argonstraat 110, 2718 SN Zoetermeer, NL
+31 88 12 44 900 • europe@SloanLED.com



SloanLED.com