

Hard ferrite magnets

Product information



thyssenkrupp



Hard ferrite magnets are the most cost effective and widely used of all magnetic materials. Both isotropic and anisotropic magnets can be produced in hard ferrite. Anisotropic hard ferrite magnets have an energy density which is 300% higher than isotropic magnets.

Magnet shapes

In principle all shapes can be produced by mold pressing: rods, bar magnets, blocks, ring magnets and other shapes. Sharp edges and corners have to be avoided as the high brittleness level of the material can cause cracks and fractures.

Drill holes and grooves can only be applied in the direction of pressing, because the preferred direction is usually parallel to it.


Indirect shaping is also possible. This is usually achieved by cutting from large sintered blocks (mainly for small magnets).

Delivery program

Our range comprises a wide selection of various hard ferrite materials with differing magnetic properties. They permit material selection tailored to individual application requirements. We look forward to advising you in detail.

Content

- 01 Short introduction
 - Magnet shapes
 - Delivery program
 - 02 Magnetic properties
 - Demagnetizing curves
 - 03 Physical properties
 - Chemical resistance
 - Production
 - Temperature behavior
 - 04 Toxicity
-

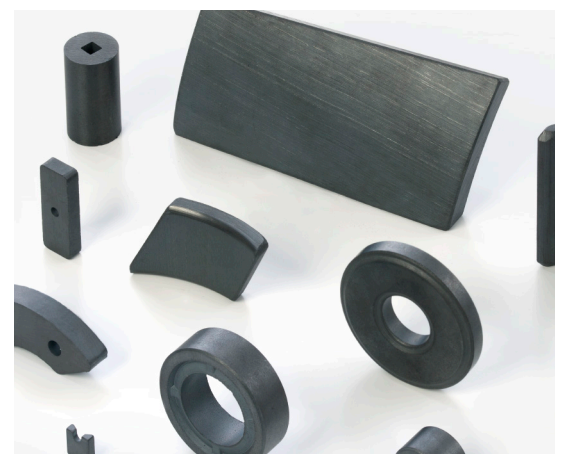


Magnetic properties

Raw material			Remanent magnetization		Coercivity				Energy product		Temperature coefficient	
			B_r		H_{cJ}		H_{cB}		$(BH)_{max}$		$TK(B_r)$	$TK(H_{cJ})$
			mT	kG	kA/m	kOe	kA/m	kOe	kJ/m^3	MGOe	%/K	%/K
Hard ferrite 8/22	i	min	210	2.1	220	2.7	135	1.7	8	1.0	-0.2	0.3
Hard ferrite 24/23	a	min	350	3.5	230	2.8	215	2.7	24	3.0	-0.2	0.4
Hard ferrite 28/16	a	min	390	3.9	160	2.0	160	2.0	28	3.5	-0.2	0.4
Hard ferrite 28/26	a	min	380	3.8	260	3.3	250	3.1	28	3.5	-0.2	0.4
Hard ferrite 28/30	a	min	380	3.8	300	3.8	260	3.3	28	3.5	-0.2	0.4
Hard ferrite 30/16	a	min	400	4.0	160	2.0	160	2.0	30	3.8	-0.2	0.4
Hard ferrite 30/26	a	min	400	4.0	260	3.3	250	3.1	30	3.8	-0.2	0.4
Hard ferrite 30/32	a	min	400	4.0	320	4.0	285	3.3	30	3.8	-0.2	0.4
Hard ferrite 32/26	a	min	410	4.1	260	3.3	250	3.1	32	4.0	-0.2	0.4
Hard ferrite 32/40	a	min	420	4.2	400	5.0	300	3.7	32	4.0	-0.2	0.4
Hard ferrite 34/30	a	min	430	4.3	300	3.8	280	3.3	34	4.2	-0.2	0.4

a = anisotropic; i = isotropic
 The magnetizing field strength is at least three times the H_{cJ} value.
 The relative permeability (μ_r) is between 1.05–1.10.

Selected material qualities (according EN 60404-8-1:2015).
 Further qualities on request.

Demagnetizing curves

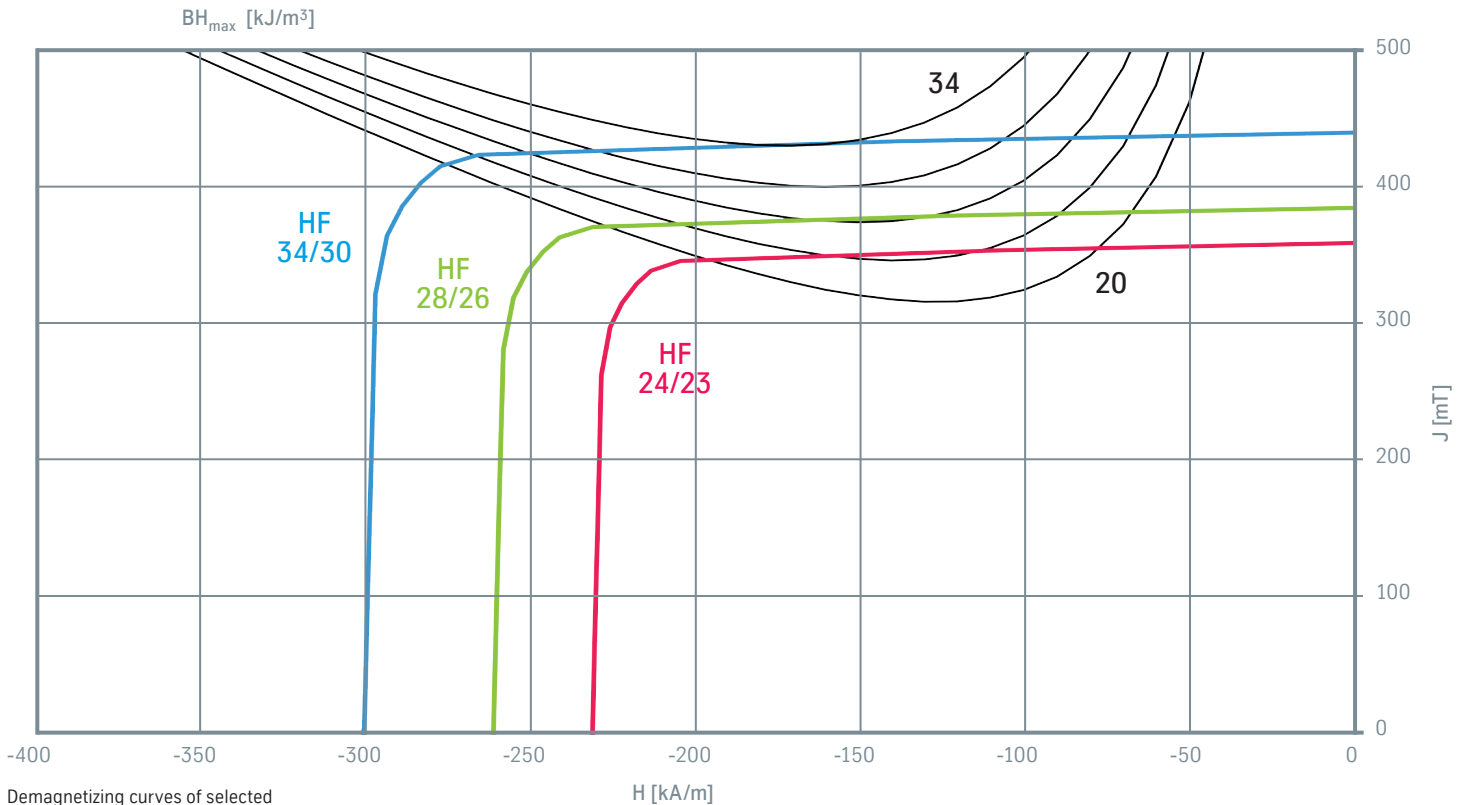

Physical properties

Raw material	Density	Young's modulus	Compressive strength	Vickers hardness	Electrical resistivity	Heat capacity	Thermal conductivity	Coefficient of linear thermal expansion	
								in magnetizing direction	normal to mag. direction
	ρ g/cm ³	E kN/mm ²	F _p N/mm ²	H _v	ρ Ω mm ² /m	C J/kg K	λ W/m K	$\Delta d l_0$ 10 ⁻⁶ /K	$\Delta d l_0$ 10 ⁻⁶ /K
Hard ferrite	4.7–4.9	120–180	300–700	~ 500	∞	500–800	5–10	9.2–13.3	9.2–10

Operating temperature
T_{max} = 250°C

Curie temperature
T_c = 450°C

Chemical resistance

Permanent ferrite magnets are to a great extent chemical resistant. They are also resistant to oxidation and climatic influences. In particular to weak organic acids like water, petrol, organic solvents, caustic potash solution, soda lye and common salt.

They are not resistant to concentrated inorganic acids (hydrochloric, sulphuric, phosphorous, hydrofluoric and oxalic).

They have a very limited resistance against acetic acid, diluted sulphuric and nitric acids.

Production

After goods inwards inspection, the raw materials (mainly iron oxide and strontium carbonate) are weighed, blended, pre-sintered and ground to a fine powder with crystals. For isotropic magnets, the raw material is consequently pressed. There are two procedures in the production of anisotropic magnets. Firstly, the raw material is dried and then pressed in a magnetic field (dry pressing). Secondly, the raw material is wet pressed under the influence of a magnetic field (wet pressing); the pressing is followed by sintering, finishing and cleaning. The surface can be machined, marked, magnetized or coated to customer requirements.

Chemical resistance

Minor effect Good	Moderate effect Fair	Sever effect Not recommended
Ozone	Nitric acid, diluted	Hydrochloric acid
Water	Sulphuric acid, diluted	Sulphuric acid
Petrol	Acetic acid	Phosphorous acid
Organic solvent		Hydrofluoric acid
Caustic potash solution		Oxalic acid
Soda lye sodium		
Chloride solution		
Developer		
Fixing bath		
Weak organic acids		

Temperature behavior

Irreversible damage of a limited nature can occur up to 250°C; the extent of same increases as the temperature rises. Depending on the application of the magnet, irreversible losses can also occur at lower temperatures. With regard to the crystalline structure of the magnet, only temperatures exceeding 1000°C result in grain structure changes and therefore irreversible losses.

Contrary to this, the magnetic parameters greatly depend on temperature. As a general rule for hard ferrite magnets – at increased temperatures the remanence decreases by 0.2% per Kelvin and the coercive field strength increases by 0.3–0.4%. At decreased temperatures, the remanence increases and the coercive field strength decreases. For this reason, selecting the correct magnet for the specific application is vitally important.

Toxicity

Ferrite magnets are non-toxic and environment friendly when disposed off on landfills. Ferrite magnets are unaffected by incineration.

Even direct contact with foodstuffs is harmless. According to foodstuff legislation, direct and continuous contact between ferrite materials and potable water is permitted.

General note

The statements are in no way to be deemed as an advisory service of our company, but are only descriptive without guaranteeing or granting property-related qualities. Liability on the basis of the statements of this product information is specifically excluded, unless compelling legal liability facts are evident. All information is correct to the best of our knowledge, but no responsibility will be taken for any errors. We reserve the right to make technical changes. Reproduction in any form, including extracts, only with the express permission of thyssenkrupp Magnettechnik.

Contact

thyssenkrupp Magnettechnik
Branch of thyssenkrupp Schulte GmbH
Am Hellweg 7, 44805 Bochum, Germany
T: +49 234 622014-00
www.thyssenkrupp-magnettechnik.com
magnet@thyssenkrupp-materials.com