

Steel


XAR[®]

Wear-resistant steels for longer service life and reduced costs in special vehicles.



thyssenkrupp



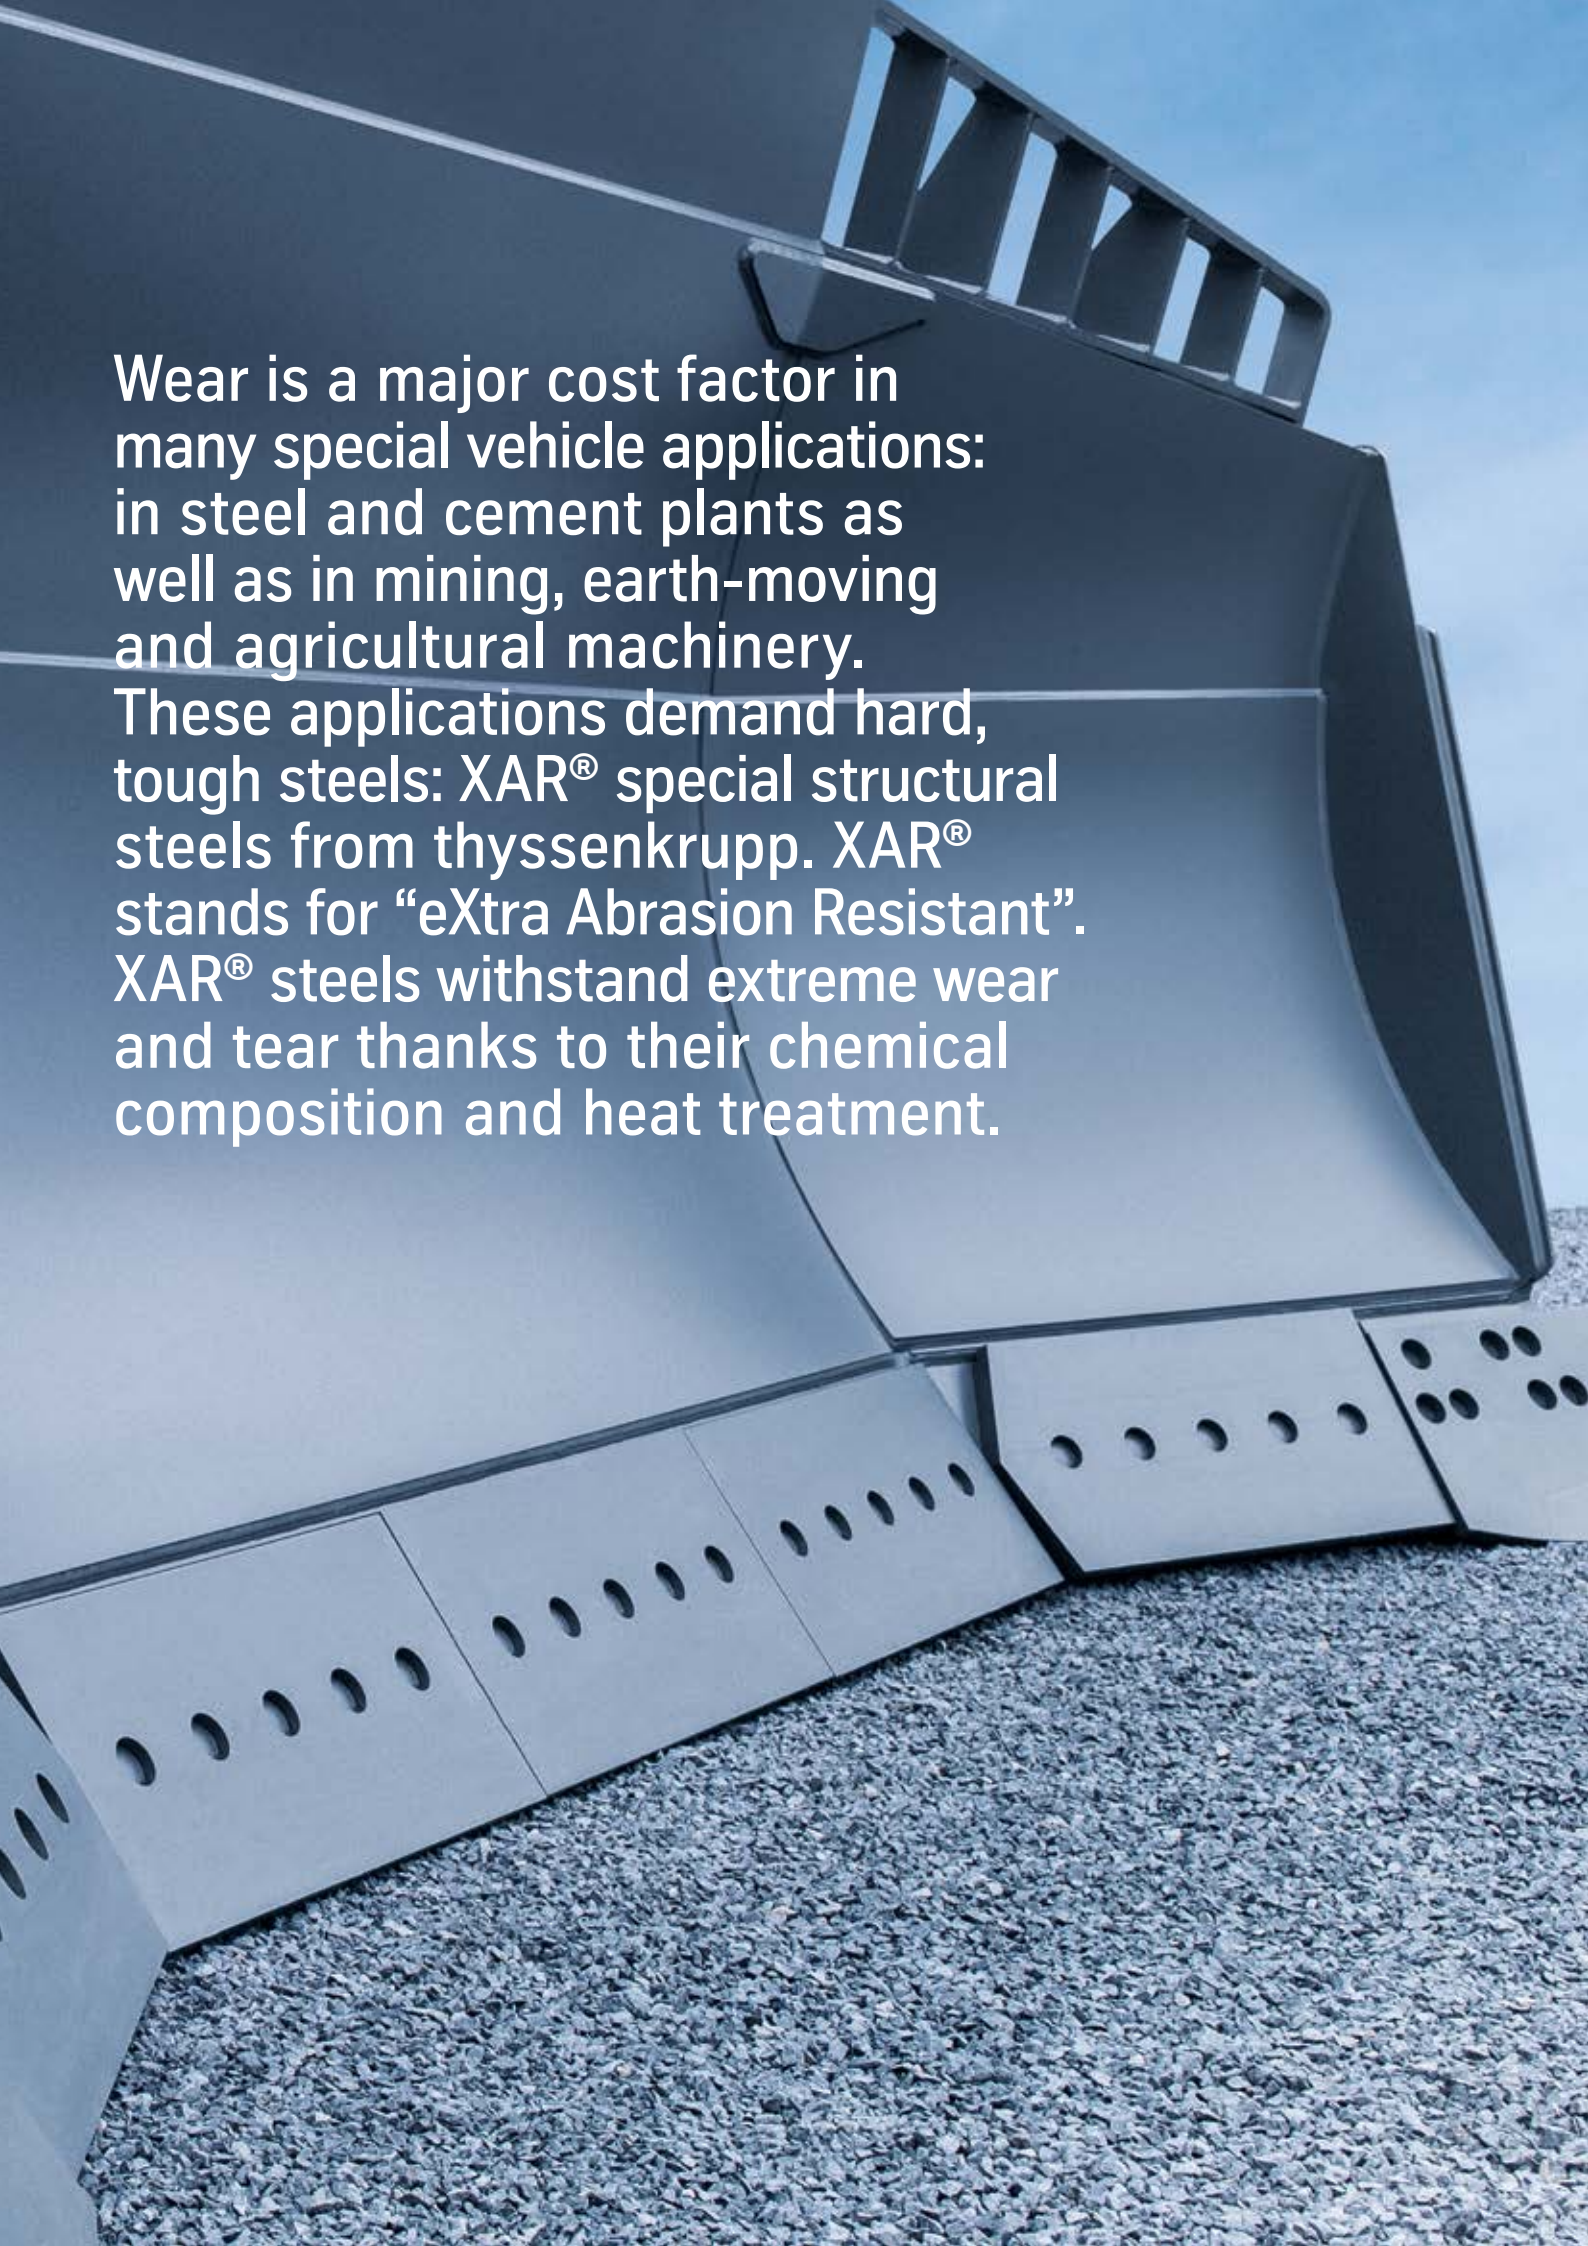

Wear is a major cost factor in many special vehicle applications: in steel and cement plants as well as in mining, earth-moving and agricultural machinery. These applications demand hard, tough steels: XAR[®] special structural steels from thyssenkrupp. XAR[®] stands for “eXtra Abrasion Resistant”. XAR[®] steels withstand extreme wear and tear thanks to their chemical composition and heat treatment.

Tough enough for the hard jobs: XAR® steels.

XAR® steels from thyssenkrupp are the perfect solution to your wear challenges: they are easy to process, minimize the impact of use under tough conditions and, depending on the application concerned, can extend service life many times over compared to conventional structural steel. In short: XAR® steels offer huge cost-saving potential.

Advantages at a glance



Higher wear resistance



Good cutting and welding characteristics



Better formability



Lower costs



Dimensions and mechanical properties

	Plate thickness [mm]	Brinell hardness [HBW]	Guaranteed toughness ¹ [J]	Typical toughness ¹ [J]	Guaranteed properties	Typical CET/CE [%] (t=15mm)
Steel grade						
XAR® 300	6–50	≥270 ¹	–	–	Hot-formable	0.42/0.70
XAR® HT	40–100	310–370	50 (–40 °C)	70 (–40 °C)	Impact energy, through-hardening	0.38/0.58
XAR® 400	4–100	370–430	27 (–20 °C)	45 (–40 °C)	Impact energy, through-hardening	0.28/0.42
XAR® 400 W	4–40	360–440	–	30 (–40 °C)	Heat-resistant up to 400 °C	0.40/0.60
XAR® 400 HR	4–25	320–440 ¹	–	27 (–20 °C)	Hot-formable, heat-resistant up to 400 °C	0.46/0.83
XAR® 450	4–100	420–480	27 (–20 °C)	40 (–40 °C)	Impact energy, through-hardening	0.32/0.46
XAR® 500	4–100	470–530	–	30 (–20 °C)	Through-hardening	0.40/0.60
XAR® 600	4–50	> 550	–	20 (–20 °C)	Through-hardening	0.53/0.78

¹⁾ For details see product information, values may vary depending on the thickness.

The right XAR[®] steel for every requirement.

XAR[®] steels are special structural steels which are extra abrasion resistant. This quality advantage is a result of our 50 years of experience in making wear-resistant steel grades. Today, virtually no one offers as wide an assortment of wear-resistant steels as thyssenkrupp – which means that we are always able to provide the optimum grade for a wide range of applications.

Our researchers are continually working to further develop our XAR[®] wear-resistant steels for you. The chemical composition was modified to gain an even higher level of toughness, while simultaneously maintaining low carbon equivalents. Resistance against impact wear and workability were improved, i. e. the steel grade now offers higher cold formability. We offer for almost all XAR[®] steels a through-hardening guarantee documented in the product information. Whether as cut-to-length or as four-high mill plate, there is a broad spectrum of applications for XAR[®]: mining, earth-moving machinery, steel works, cement plants and agricultural machinery.

For moderate wear.

Some applications don't entail quite such extreme wear. XAR[®] 300 was developed for these applications: a steel that is produced using normalizing rolling, without any heat treatment. One that is ideal for hot forming. It offers great value for money together with excellent surface quality.

For great hardness and wear resistance.

XAR[®] 400 is the most frequently used wear-resistant steel from the XAR[®] family, used in a wide range of applications. Depending on the type of exposure, it extends service lives many times over compared to conventional structural steel. XAR[®] 400 combines high wear resistance with exceptional cold-forming and welding characteristics. The heat-resistant variants XAR[®] 400 W and XAR[®] 400 HR are the ideal steel grades when you need great hardness and wear resistance at temperatures of up to 400°C – for instance in cement plants and coal mills.

For guaranteed toughness.

XAR[®] 450 is the steel of choice where both higher wear resistance and processability comparable to the standard grade XAR[®] 400 are required. Special feature: superior toughness. thyssenkrupp guarantees the toughness of both XAR[®] 400 and XAR[®] 450 and documents it in the product information. Now you can combine all this with the advantages of cut-to-length sheets: highest surface quality, very good coating properties, good flatness and close thickness tolerances.

For extreme abrasion.

The steel grade XAR[®] 500 is available for high-wear applications: a steel that can be both formed and welded easily. Thanks to its exceptional hardness, XAR[®] 600 is precisely the right steel for extremely high abrasion – without impact loads.

For extreme toughness.

For applications with high impact wear, XAR[®] HT is the steel you need. It is optimized for extremely high impact toughness. That means it is highly resistant to cracking under impact loads, in addition to its abrasion resistance.

Hard to beat. Easy to form. Ready to serve.

Highly wear-resistant – yet easy to process.

XAR® steels combine high wear resistance with good processing characteristics. Microalloying with niobium enhances toughness and cold-forming characteristics as well as resistance to impact wear. Alloying with chromium additionally increases wear resistance in corrosive media. New and improved products are continually tested in our own wear laboratory, which is also available for customer tests.

The optimized compositions and low-carbon equivalent of XAR® steels facilitate cutting and welding as well as cold forming at tight bending radii. For example, no preheating is required to flame-cut XAR® 400 steel up to plate thicknesses of 50 mm. 20 mm plates of XAR® 400 permit bending with an r/t ratio of ≥ 3.0 (perpendicular to rolling direction).

Primers for high-quality corrosion protection.

The plates are shot-blasted and primer-coated to meet the most stringent surface quality requirements. We carry out these processes at our state-of-the-art blasting and coating facility at our plant in Duisburg. Here, a silicate shop primer with a low zinc content is evenly applied in a thickness of 12 to 20 μm following shot-blasting. In studies, these primer-coated plates have proven suitable for trouble-free processing with laser cutting machines. Thanks to its inorganic components, the shop primer can be easily welded over, so it generally does not need to be removed before welding.



What do scientists say?

An expert opinion of the Institute for Tribology at the Mannheim University of Applied Sciences attests to the superior suitability of XAR® steels.

“Among low-alloyed, wear-resistant special structural steels with good processing characteristics, the thyssenkrupp XAR® steels, with hardnesses of 300 to 600 HB, constitute an optimum solution with respect to the steel composition, manufacturing process and microstructure”*.

* „Gutachtliche Stellungnahme zum Verschleißverhalten der verschleißfesten Sonderbaustähle der Thyssen Krupp Steel AG“ (“Expert opinion on the wear behavior of wear-resistant from Thyssen Krupp Steel AG special structural steels”) 2001 and 2006, Prof. Dr. Feinle.

thyssenkrupp – a partner that understands its business. And yours.

Our mission is to advance your business – through sound advice, individual and innovative solutions and fulfillment of your specific needs. Our extensive technological know-how, gained over many years, makes this possible. As does our ability to see things the way you do. This enables us to develop an in-depth understanding of your business model. Our brand promise says it all: “engineering. tomorrow. together.” Because when it comes to finding successful solutions for tomorrow, the closer we cooperate the better.

Comprehensive advice.

To ensure that you get the best advice on the selection and processing of XAR® steels, our Technical Customer Service is at your disposal. They are 100% committed to offering you comprehensive assistance with regard to design and processing, answers to structure- and forming-related issues, product training, and of course technical support in optimizing fabrication processes.

Tailored service.

For high-quality logistics and processing, our global distribution network ensures rapid supply and just-in-time delivery of XAR® steels – in top quality and with excellent value for money. Close cooperation with our steel service centers additionally enables us to offer pre-fabricated, cold-formed or welded parts.

Practical virtual tool.

Naturally, you can find specific information about our special structural steels on our website:



www.thyssenkrupp-steel.com/plate

This includes useful product information, processing recommendations and a direct line to your Business Unit Heavy Plate's personal service representatives for sales and technical consulting. You can also access ProWear and ProWeld, thyssenkrupp's web-based application for wear and welding calculations. After registering as a user, you can log in and use this tool for your projects at any time, free of charge.

General information: All statements as to the properties or utilization of the materials and products mentioned in this brochure are for the purpose of description only. Guarantees in respect of the existence of certain properties or utilization of the material mentioned are only valid if agreed in writing. Subject to technical changes without notice. Reprints, even extracts, only with the permission of thyssenkrupp Steel Europe AG, Business Unit Heavy Plate.



Steel

thyssenkrupp Steel Europe AG
Kaiser-Wilhelm-Strasse 100
47166 Duisburg, Germany
P: +49 203 52-0
F: +49 203 52-25102
www.thyssenkrupp-steel.com
info.steel@thyssenkrupp.com

Heavy Plate

Mannesmannstrasse 101
47259 Duisburg, Germany
www.thyssenkrupp-steel.com/plate
info.plate@thyssenkrupp.com

Sales

P: +49 203 52-75617
F: +49 203 52-75653

Technical Customer Service

P: +49 203 52-75199
F: +49 203 52-75653

Local contact

thyssenkrupp Materials
Unit 2 Watchmoor Point
Watchmoor Road
Camberley
Surrey
GU15 3AD
P: +44 1276 673-140 – Automotive
P: +44 1276 673-150 – Industry
mildsteel.tkmuk@thyssenkrupp.com
www.thyssenkrupp-materials.co.uk/mild-steel