


PosterBOX™ ID

High-performance light box illumination for interior signage and POP applications

Specifications

- Part number** Short..... 701946-6WSNP1
 Long..... 701946-6WLN1P1
- Dimensions L × W × H** Short..... 225.0 mm × 27.5 mm × 15.7 mm
 (8.9 in × 1.1 in × 0.62 in)
 Long..... 495.3 mm × 27.5 mm × 15.7 mm
 (19.5 in × 1.1 in × 0.62 in)
- LEDs per assembly** Short..... 3
 Long..... 6
- Operating temperature** -40° C to +40° C
- Locating rating** Indoor use only
- Power per assembly** Short..... 7.2 W
 Long..... 14.0 W
- Optional dimming** PWM (Pulse width modulation,
 SloanLED Universal LED Wireless Dimmer 601115)
- Efficacy** Short..... 118 lm/W
 Long..... 121 lm/W
- Power capacity** **Per SloanLED 100 W 24 VDC power supply**
 Short..... Maximum of 12 units
 Long..... Maximum of 6 units
- Fastening** Peel-n-stick and mechanical
- Packaging** Six (6) assemblies per bag, 5 bags per carton
- Color temperature** 6500 K
- Lumens per assembly** Short..... 850
 Long..... 1,700

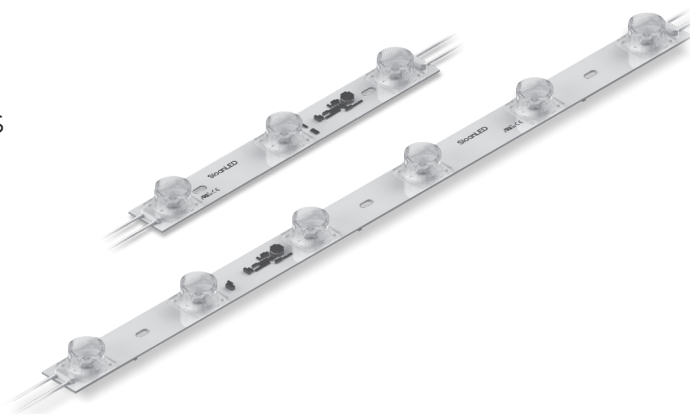

Power Supply Capacity

24 VDC power supply	Max. units per power supply	
	Short	Long
100 W Power Supply	12	6
300 W Power Supply	3 × 12	3 × 6
Power used per unit in Watts	7.2 W	14.0 W

SloanLED Headquarters
 5725 Olivas Park Drive, Ventura, CA, USA
 805.676.3200 • info@SloanLED.com

SloanLED Europe b.v.
 Argonstraat 110, 2718 SN Zoetermeer, NL
 +31 88 12 44 900 • europe@SloanLED.com



SloanLED.com



Visit product page for details.

